


## RECREATIONAL VEHICLE CARBON MONOXIDE ALARM

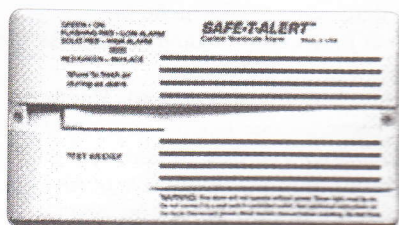

Model 60-541 Surface Mount

### MODELS 60-541 AND 60-542 USER'S MANUAL

PATENTS PENDING

ALL RIGHTS RESERVED

MADE IN USA

60MCD196-00

**ATTENTION:** The owner's manual should be read, followed and kept for future reference. This manual contains important information. Purchasers who install this alarm for use by others must leave this manual with the user.

**WHY EVERY RECREATIONAL VEHICLE NEEDS A SAFE-T-ALERT™ CARBON MONOXIDE ALARM:** Everyone is at risk for carbon-monoxide poisoning! Particularly sensitive are children, pregnant women, the elderly and people with lung or heart disease or anemia! Carbon Monoxide (CO) is an odorless, colorless gas that prevents the blood from carrying oxygen to vital organs. CO is 200 times more likely to replace oxygen in the blood. The Consumer Product Safety Commission (CPSC) recommends use of at least one carbon monoxide ALARM located outside of sleeping areas. For best security locate an alarm in each sleeping area.

#### **ABOUT CO GAS AND YOUR NEW CO ALARM**

- Carbon monoxide gas is a colorless, odorless, tasteless gas and it is highly poisonous, endangering lives even at low levels of concentration.

- Many cases of reported carbon monoxide poisoning indicate that while victims are aware they are not well, they become so disoriented they are unable to save themselves by either exiting the building or calling for assistance. Also, children and pets may be affected first.

- Carbon monoxide gas is produced when any type of fuel is incompletely burned. Gasoline engines and fuel burning appliances (furnace, fireplace, oven stove, water heater etc.) space heaters, gas and charcoal grills, etc. produce CO.

- Extended operation of unvented fuel burning appliances (range, oven, fireplace, etc.) can build up high CO levels.

- CO build up can be caused by reverse/negative venting of fuel burning appliances including: 1) Clogged, loose or faulty stacks or chimneys of (clothes dryers, furnaces and water heaters, etc.), 2) wind direction and/or velocity; 3) simultaneous operation of multiple fuel burning appliances, and/or exhaust fans.

- An idling vehicle in an open or closed garage, or near a home can cause high levels of CO to build up in a residence.

- Temperature inversions can trap exhaust near the ground.

- The electronic sensor in your Safe-T-Alert™ CO alarm is self-cleaning, very sensitive to carbon monoxide (CO) gas, and will not react to non-hazardous levels of most other gas.

- The test switch on the Safe-T-Alert™ CO alarm accurately tests all alarm functions. It is the only way to test the alarm.

#### **HOW ELSE TO PROTECT YOUR FAMILY FROM CARBON MONOXIDE**

- INSTALL CO ALARMS PROPERLY.** Carefully read and follow ALL the instructions in this manual. Test your unit every week. Alarms that do not work will not alert you to hazardous levels of CO gas.

- MAKE REGULAR VISUAL INSPECTIONS** of all fuel burning

equipment including gas water-heaters, kitchen gas stoves, space heaters, gas dryers and all pilot lights; check the color of the flame. The color of the flame should be blue.

- MAKE REGULAR VISUAL INSPECTIONS OF THE ENGINE AND GENERATOR EXHAUST SYSTEMS.** Cracked exhaust systems can allow carbon monoxide to enter the living area.

- PROFESSIONALLY MAINTAIN YOUR ENGINE AND GENERATOR.** Although gas engines and generators produce carbon monoxide, a poorly tuned engine and generator will produce greater amounts carbon monoxide



#### **WARNING: LIMITATIONS OF CARBON MONOXIDE ALARMS:**

**Carbon monoxide alarms will not work without power.** Some examples causing no alarm power are: A blown or missing fuse, broken wire, faulty wire connection or circuit breaker, a discharged battery.

**CAUTION-This alarm will only indicate the presence of carbon monoxide gas at the sensor.** Carbon monoxide gas may be present in other areas. MTI recommends that alarms be installed in all sleeping areas.

Carbon monoxide alarms may not be heard. The alarm loudness is designed to meet or exceed regulatory standards, however, the alarm may not be heard if alarms are located in remote locations or behind closed doors. The alarm may not be heard by persons who are hard of hearing, have consumed alcoholic beverages, taken prescription, non prescription or illegal drugs.

**This Carbon Monoxide alarm is designed to detect carbon monoxide from ANY source of combustion. It is not designed to detect smoke, fire, or any other gas.** This device may not alarm at low carbon monoxide levels. This CO alarm is intended for use in ordinary indoor locations of family living units. It is not designed to measure compliance with the Occupational Safety Health Administration (OSHA) commercial or industrial standards. Individuals with medical problems may consider using warning devices which provide audible and visual signals for CO concentrations under 30 ppm. SEE "VISUAL AND AUDIBLE SIGNALS"

#### **INSTALLATION INSTRUCTIONS: Models 60-541 and 60-542.**

##### **WHERE NOT TO INSTALL CO ALARMS**

- DO NOT INSTALL BEHIND FURNITURE, DRAPES, IN CLOSETS OR AREAS THAT WILL BLOCK AIR FLOW TO THE ALARM.
- DO NOT INSTALL WITHIN 12 INCHES OF OPENING WINDOWS, EXTERIOR DOORS, HEATING OR RETURN VENTS, OR OTHER DRAFTY AREAS.
- THE ALARM SHOULD NOT BE LOCATED WITHIN 5 FEET (1.5m) OF ANY COOKING APPLIANCE.

##### **WHERE TO INSTALL CO ALARMS**

For **MINIMUM** protection, CO alarms should be installed near all sleeping areas. For **MAXIMUM** protection, CO alarms should be installed in all sleeping areas.



#### **WARNING**

FAILURE TO FOLLOW THE FOLLOWING INSTRUCTIONS MAY RESULT IN A MALFUNCTION OF THE ALARM AND MAY VOID THE WARRANTY.



#### **WARNING**

CONNECT ONLY TO WIRING THAT CANNOT BE TURNED OFF BY A SWITCH OR GROUND FAULT PROTECTOR. Only use UL&E recognized connectors.



#### **WARNING**

These alarms are designed to be mounted on a wall 12" to 72" off the floor. See Where TO and NOT TO Install CO alarms.



#### **WARNING**

**SHOCK HAZARD: Turn off power before installing.** Power Supply 12 VDC. Recommended Wire Size 14 GA TO 18GA



Connect the alarm to a properly fused circuit, maximum over protection device rating 15 amps. All connections must be in accordance with the National Electrical Code.

1. Select a wall location and drill a 1/4" hole for the 60-541. Cut a 4"W x 3"H hole for the 60-542. **Note:** The 60-542 requires 13/8" clearance for the case.

2. Connect Supply (+) to the Red wire lead.

Ground to Black (-) to the Black wire lead.

3. Reconnect the power supply.

• ALL WIRING METHODS SHALL BE IN COMPLIANCE WITH THE NATIONAL ELECTRIC CODE OR CANADIAN ELECTRIC CODE

### **TEST PROCEDURE**



#### **WARNING**

TO REDUCE THE RISK OF CARBON MONOXIDE POISONING, TEST THE ALARM'S OPERATION AFTER THE RV HAS BEEN IN STORAGE, BEFORE EACH TRIP AND AT LEAST ONCE PER WEEK DURING USE.



#### **WARNING**

DO NOT attempt to test the alarm by any other means than by using the TEST/RESET button. DO NOT attempt to produce CO to test the alarm. The TEST/RESET button tests all functions of the alarm and is the ONLY safe way to be sure the alarm is working properly.

The alarm may be tested at any time after power is applied by pressing the TEST/RESET button, located on the front of the alarm. The alarm is working properly if the GREEN indicator light changes color to RED and the horn is sounds.

### **OPERATION**

Each Safe-T-ALERT™ CO alarm is equipped with a self-cleaning CO sensor and requires a ten (10) minute initial warm-up period to clean the sensor element and achieve stabilization. The GREEN indicator will flash on and off during the 10 minute warm up period.

The GREEN power ON indicator should glow continuously after the warm up period. If the indicator light does not light, recheck all wire and power connections. Return this alarm for service if the power connections are correct but the indicator still does not light. Do not attempt to fix it yourself.

This Safe-T-Alert™ CO alarm is designed to be as easy to operate as possible. This alarm has an indicator light that displays a specific color for each monitored condition.

There also is a matching sound pattern for alarm conditions.

### **VISUAL SIGNALS AND AUDIBLE SIGNALS**

• **LOW CO ALARM** - FLASHING RED LIGHT, AND 4 "BEEPS" THEN OFF FOR 5 SECONDS - indicates the presence of 70 ppm or more of CO. **IMMEDIATE ACTION IS REQUIRED.** See "Procedures To Take During An Alarm." This cycle will continue until the reset switch has been activated. Then the RED light will continue to flash until the CO has cleared, or the alarm will reactivate in approximately 6 minutes in the event carbon monoxide is still present. If the level of CO continued to rise above 100 ppm the FLASHING RED LED will change to STEADY RED. See CO Alarm Below.

• **HIGH CO ALARM** - STEADY RED LIGHT AND 4 "BEEPS" THEN OFF FOR 5 SECONDS - indicates that the CO level is over 100 ppm. **IMMEDIATE ACTION IS REQUIRED.** See "Procedures To Take During An Alarm." This cycle will continue until the reset switch has been activated. Then, the RED light will stay ON until the CO has cleared, or the alarm will reactivate in approximately

• **MALFUNCTION/SERVICE SIGNAL:** If service malfunction/signal sounds (one beep ever 30 seconds and alternating red and green light) and the TEST/reset will not clear the signals; if battery voltage is not low, return for service.

• **MEMORY FEATURE:** This Safe-T-Alert™ CO alarm has a Peak Level Memory feature that remembers the approximate amount of carbon monoxide that activated the alarm. **To activate alarm level memory, press the Test switch for less than 1 second.**

**Note:** (1) "Beep" and (1) Green Flash means memory is clear.  
(2) "Beeps" and (2) Red Flashes = under 100 ppm  
(3) "Beeps" and (3) Red Flashes = under 200 ppm  
(4) "Beeps" and (4) Red Flashes = over 200 ppm

To reactivate memory repeat step 1. To erase memory, disconnect power for 15 seconds.

The following symptoms may be related to **CARBON MONOXIDE POISONING** and should be discussed with ALL members of the household:

**Mild Exposure:** Headaches, running nose, sore eyes, often described as "Flu-like" symptoms.

**Medium Exposure:** Dizziness, drowsiness, vomiting.

**Extreme Exposure:** Unconsciousness, brain damage, death.

### **PROCEDURES TO TAKE DURING AN ALARM IN THE USA**



**WARNING:** Actuation of this device indicates the presence of carbon monoxide (CO) which can KILL YOU. If signal sounds (4 beeps and flashing or solid red light): **1)** Operate the reset/silence button; **2)** Call your emergency local service (Phone Number \_\_\_\_\_) (fire department or 911); **3)** Immediately move to fresh air - outdoors or by an open door/window. Do a head count to check that all persons are accounted for. Do not reenter the premises nor move away from the open door/window until the emergency responders have arrived, the premises have been aired out, and your alarm remains in its normal operation. **4)** After following steps 1-3, if your alarm reactivates within a 24 hour period, repeat steps 1-3 and call a qualified appliance technician. (Phone Number \_\_\_\_\_) to investigate for sources of CO from fuel burning equipment and appliances, and inspect for proper operation of this equipment. If problems are identified during this inspection have the equipment serviced immediately. Note any combustion equipment not inspected by the technician and consult the manufacturers' instructions, or contact the manufacturer directly, for more information about CO safety and this equipment. Make sure that the motor vehicles are not, and have not been, operating in an attached garage or adjacent to the residence.

### **PROCEDURES TO TAKE DURING AN ALARM IN CANADA**



**WARNING:** Actuation of this device indicates the presence of carbon monoxide (CO) which can KILL YOU. If signal sounds (4 beeps and flashing or solid red light: 1) Immediately move to fresh air - outdoors or by an open door/window. Check that all persons are accounted for. Do not reenter the premises or move away from the open door/window until the emergency responders have arrived, the premises have been aired out, and your alarm remains in its normal condition; 2) call your emergency local service (telephone number \_\_\_\_\_) ( fire department or 911). After following steps 1-2, if your alarm reactivates within a 24 hour period, repeat steps 1-2 and call a qualified appliance technician. (Phone Number \_\_\_\_\_) to investigate for sources of CO from fuel burning equipment and appliances, and inspect for proper operation of this equipment. If problems are identified during this inspection have the equipment serviced immediately. Note any combustion equipment not inspected by the technician and consult the manufacturers' instructions, or contact the manufacturer directly, for more information about CO safety and this equipment. Make sure that the motor vehicles are not, and have not been,



## HOW TO TAKE CARE OF YOUR ALARM

Your carbon monoxide alarm is designed to be as maintenance free as possible. To keep your alarm in good working order, you must:

- **Test the alarm weekly.** (See "TEST PROCEDURE")
- **Observe the color of the indicator light** on the front panel of the alarm at frequent occasions and during your weekly test. (See section "Operating Instructions")
- **Vacuum the dust off the alarm cover** at least once a year (more frequently in dusty locations) using the soft brush attachment of your vacuum.
- **Clean the alarm cover** when dirty. Hand wash using a cloth dampened in clean water. Dry with a soft cloth.
- **DO NOT SPRAY CLEANING AGENTS OR WAXES** directly onto the front panel. The area should be well ventilated when household cleaning supplies or similar contaminants are used.

## TROUBLE SHOOTING

PROBLEM	CAUSE/SOLUTION
GREEN LIGHT OFF	1. WIRE CONNECTION
	2. REVERSED WIRING
	3. MAIN POWER OFF
	4. MISSING OR BLOWN FUSE
	5. RETURN
NO SOUND IN TEST	
NO RED LED IN TEST	RETURN IMMEDIATELY
LOCKED IN RED ALARM	
ALARM WITH RED/GREEN LED - WILL NOT RESET	RETURN IMMEDIATELY

## SPECIFICATIONS

SAFE-T-ALERT™	60-541 and 60-542
Power Supply	12 VDC
Operating Voltage	7 -16 VDC
Average Standby Current Draw	60 mA @ 12 VDC
Operational Temperature	-40o F to +150o F -40o C to +66o C
Relative Humidity	15% (+/- 5%) to 95% (+/- 4%)
Gas Detected	Carbon Monoxide
CO Alarm Level	OVER 100 PPM
Low CO Alarm	70 to 100 PPM
No Alarm	30 ppm for 30 Days
Warm Up Time	10 Minutes
Alarm Silence Time	Under 6 Minutes
Case Dimensions	60-541 5"x3"x15" 60-542 6.5"x3.5"x1.5"
Audible Alarm	85 db @ 10 Feet
NORMAL OPERATION	AUDIBLE SIGNAL VISUAL SIGNAL
LOW CO ALARM	NONE GREEN
CO ALARM	4"BEEPS" 5 SECONDS OFF FLASHING RED
MALFUNCTION	4"BEEPS" 5 SECONDS OFF STEADY RED BEEP EVERY 30 SECONDS RED/GREEN
Applicable Standards Listed to	UL 2034 RV REV NOVEMBER 14, 2003 ULc CSA 6.19-01

## LIMITED WARRANTY LIMITED PRODUCTS WARRANTY

**MTI INDUSTRIES, INC.** Warrants to the original purchaser that this carbon monoxide alarm will be free from defects of material or workmanship for a period of THREE (3) YEARS, from the date of original purchase. Return this alarm, delivery costs prepaid, if defective in original materials or workmanship and MTI INDUSTRIES, INC. will repair or replace this alarm free of charge.

### LIMITES OF WARRANTY

Repair or replacement is your exclusive remedy under this limited warranty or any other warranty (including any implied warranty of merchantability for a particular purpose). Any and all implied warranties or merchantability or fitness for a particular purpose shall be limited to the warranty period from the original date of purchase. MTI INDUSTRIES, INC., its dealers and distributors shall in no case be responsible or in any way liable for any incidental or consequential damages for any reason. Some states do not allow the limitation or exclusion of incidental or consequential damages, or allow limitations on how long an implied warranty lasts, so the above limitations may not apply to you. This warranty gives you specific rights, and you may also have other rights that may vary from state to state.

### WARRANTY RETURN POLICY

Warning- opening this product for any reason voids the warranty. There are no user serviceable parts inside the case. This detector requires an authorization number (RA) for repair or replacement. Call MTI for a RA number. To return products under warranty pack the alarm carefully in a padded container. Include an explanation of the problem, the original dated sales receipt, and your return address. Send, shipping prepaid, to: MTI Industries, Inc. 31632 N. Ellis Drive

Unit 301 Volo, IL 60073 Customer Service Phone No. - 800-383-0269 e-mail info@mtiindustries.com Fax No. - 847-546-9007

Web Site: [www.mtiindustries.com](http://www.mtiindustries.com)

PATENTS PENDING

© MTI INDUSTRIES 2002